

GUMA

T R A F F I C

TECHNICAL SHEET TOP IT

Product Name:

TOP IT

Manufacturer:


GUMA TRAFFIC

Product Description:

The parking stop for vehicles TOP IT, is made with 100% recycled rubber from light and cargo vehicle tires (NR, SBR), resulting in an environmentally friendly product, and supporting the workloads for which it has been designed.

The length is 183 cm (22") and it is produced with yellow or white vulcanized reflective tape to increase its visibility.

Product Dimensions:

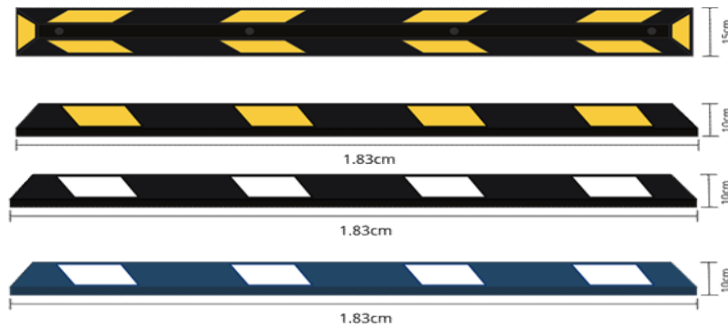

Product Specifications:

Material: 100% recycled rubber and polymers

Dimensions:

Model:	TOP IT
Height:	10 cm ± 3 mm (4" ± 1/8")
Width:	15 cm ± 1.5 mm (6" ± 1/16")
Lenght:	183 cm ± 12 mm (72" ± 1/2")

Peso del Producto:

Weight: 15.4 kg (34 lb)

Mechanical properties:

Characteristic	Specification	Reference norm
Density	1.04 g/cm ³ (0.6 oz/in ³)	ASTM C642
Hardness (Shore A)	65 ± 7	ASTM D2240
Tensile strength (in structural areas)	1.45 MPa (210PSI) Mínimo	ASTM D412
Coefficient of thermal expansion	14 X 10 ⁻⁵ cm/cm/°C (8 X 10 ⁻⁵ in/in/°F)	ASTM C531
Compressive Strain	10% a 0.48MPa (70 psi), 20°C (68°F)	ASTM D 575
Brittle Temperature	-40 °C (-40 °F)	ASTM D746
Freezing and thawing when exposed to chemicals	No losses after 50 cycles	ASTM C672
Wet for 70 hours at 70°C (158°F)	Maintains hardness 100% (± 5%)	ASTM D 573
	Compressive stress 100% (± 5%)	
	Tensile stress 100% (± 5%)	
	Retains elongation 100% (± 5%)	

Warranty: 1 year on rubber and 6 months on label, under normal conditions of use installed according to manufacturer's instructions.